


C-more® 6" PANEL CUTOUT


EA7-S6M-R
EA7-T6CL-R
EA7-S6M
EA7-T6CL



NOTE: The C-more 6" touch panels will fit into the existing cutout of any EZTouch 6" slim bezel panel. Use the C-more 6" Adapter Plate, EA-6-ADPTR, to install C-more 6" panels into existing cutouts of EZTouch 6" non-slim (rounded bezel) panels.

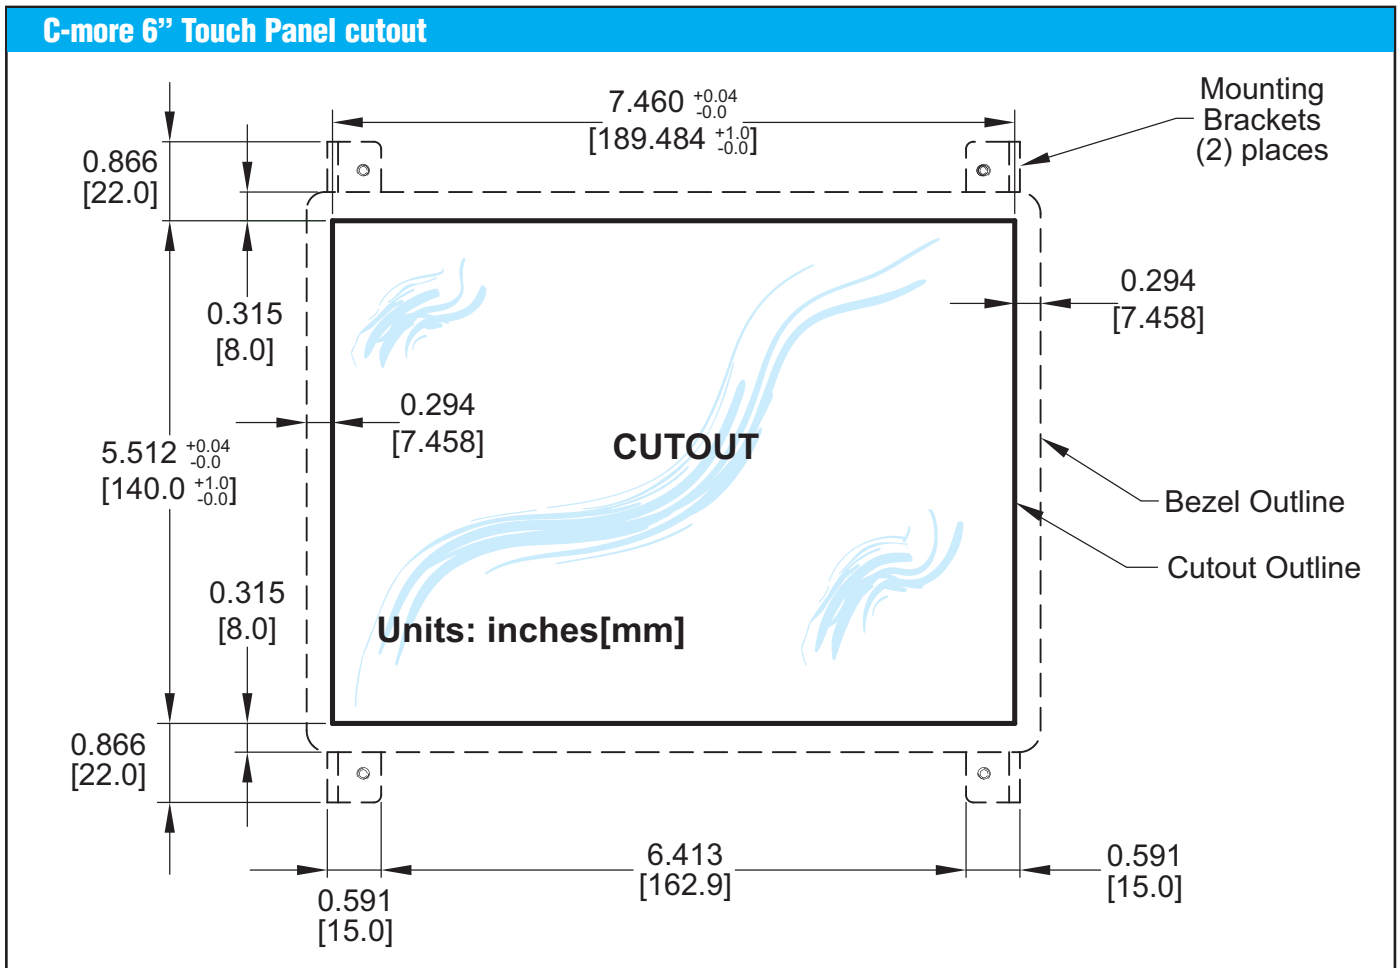

Enclosure Mounting Thickness Range and Mounting Bracket Screw Torque

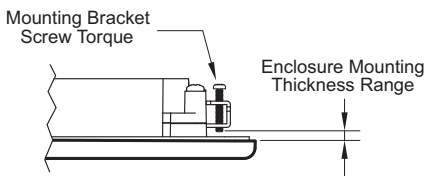

Touch Panel Size	Enclosure Thickness Range	Mounting Bracket Screw Torque
6" – lower mounting bracket position	0.039 - 0.24 inch [1 - 6 mm]	35 - 50 oz-in [0.25 ~ 0.35 Nm]
6" – upper mounting bracket position	0.20 - 0.63 inch [5 - 16 mm]	35 - 50 oz-in [0.25 ~ 0.35 Nm]
8", 10", 12" & 15"	0.039 - 0.20 inch [1 - 5 mm]	42 - 57 oz-in [0.3 ~ 0.4 Nm]